

PRX Traffic Manager

Datasheet

Benefits

- Reduced communication and infrastructure costs
- Comprehensive network visibility
- QoS management per application and subscriber
- Restrict unauthorized network access
- Tiered service and pricing models
- Network policy management



PRX Traffic Manager is a comprehensive and cost-effective bandwidth management solution enabling operators to monitor and control network traffic per application and per subscriber.

PRX Traffic Manager detects applications with a combination of layer-7 deep packet inspection (DPI) and behavioral traffic analysis. All major protocols including P2P file sharing, instant messaging, media streaming and Internet telephony are supported. The integrated QoS management allows prioritization, shaping and blocking of classified traffic. Extensive accounting features provide in-depth application- and subscriber-aware network visibility.

Key Features

- Layer-7 protocol detection with DPI and behavior analysis
- VoIP, P2P, IM, media streaming, Web, e-mail protocol support
- Detection of encrypted protocols like Skype, BitTorrent, eDonkey/eMule, Winny
- Subscriber-level bandwidth and policy management
- True gigabit wire speed
- Over 600,000 packets per second
- Over 20 million concurrent connections
- Over 500,000 new connections per second
- Permit legal and illegal file sharing
- Regular signature updates
- Fast integration as transparent bridge
- Integrated bypass and hot standby for hardware failover
- Web GUI and CLI for flexible administration

The Bandwidth and Performance Challenge


Bandwidth intensive applications such as peer-to-peer-based file sharing (P2P) use up a disproportionately high amount of network resources. This drives up communication and infrastructure costs and adversely affects the quality of important business applications such as ERP and CRM systems, as well as next generation applications like Internet telephony or video on demand.

P2P networks are used on a massive scale to distribute copyright-protected content, which can cause legal consequences for network operators. Many file sharers are also using one-click file hosting services providing direct download links to the shared content (DDL). Specifically, ISP and educational networks often encounter a small percentage of heavy users consuming a large proportion of the available bandwidth.


Uncontrolled and unmanaged availability of P2P, Internet telephony (VoIP, Skype), instant messaging (IM) and video streaming applications is known to pose serious security threats and decrease staff productivity due to the often non-work-related nature of these applications.

Traditional Internet gateway products such as firewalls often fail to recognize these applications, as they frequently use stealth techniques like protocol obfuscation and encryption to evade detection. In many instances, such systems are overwhelmed by the large number of parallel connections that are opened by these applications.


Protocol Distribution

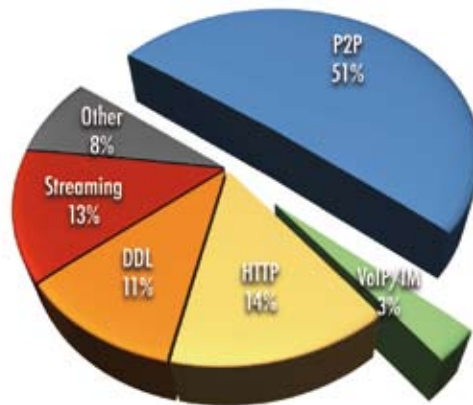

P2P Content Distribution

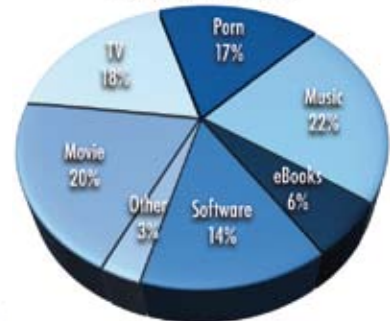

VoIP / IM

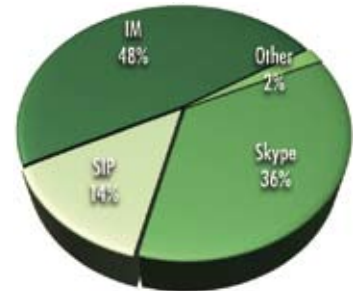

Source: ipoque P2P Survey

PRX Traffic Manager Solution


PRX Traffic Manager uses ipoque's layer-7 deep packet inspection and behavior analysis technology to detect even the most elusive protocols, even if they use advanced obfuscation, port hopping, encryption and other techniques to hide from detection.

PRX Traffic Manager provides comprehensive and detailed insight into the network's per-application and per-user traffic. This information can be used to define bandwidth management rules to prioritize, shape, block and log individual applications' traffic, either in total or for individual users or user groups.

Operators can offer tiered network service and pricing models along with flexible and fair bandwidth allocation. Premium applications can be prioritized and bandwidth-intensive P2P or streaming applications can be limited.

PRX Traffic Manager provides a unique white listing feature for BitTorrent trackers so that providers can offer legal P2P services with no copyright infringements.

Screenshot PRX Traffic Manager

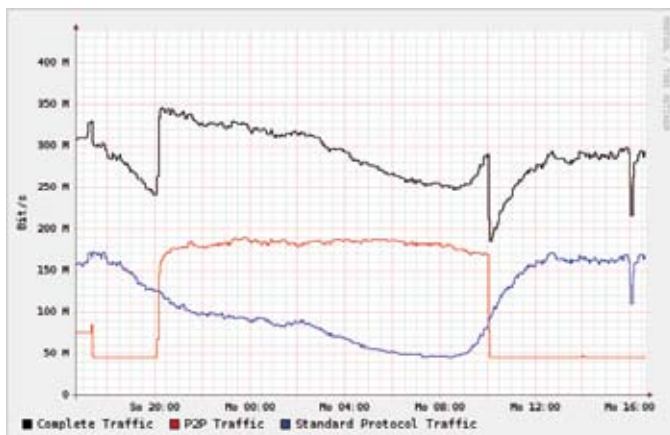

Voice over IP and Skype

All important protocols used for Internet telephony based on Voice over IP (VoIP) are supported, including SIP, Skype and H.323. The availability of phone service can be selectively controlled per protocol, user and VoIP provider. The integrated QoS functionality of PRX Traffic Manager can enforce priority and guaranteed bandwidth for these real-time applications. Detailed call logging functions can be activated to analyze the service usage.

Ultimate Performance

PRX Traffic Manager has been optimized to meet the performance requirements of the most demanding network environments. Performance scales up to fully loaded Gigabit links. Its internal design avoids packet queuing yielding latencies below 0.1 millisecond on normally loaded and below 1 millisecond on fully loaded links.

The PRX-5G supports multiple network links per system that can be configured based on customer requirements.

High Availability

The built-in bypass switch for all copper interfaces maintains network connectivity during firmware updates or in case of a system failure. Two PRX Traffic Managers can be installed in a daisy-chain hot standby configuration. The secondary system maintains all state information and automatically takes over if the primary system fails.

Simple Installation and Operation

PRX Traffic Manager operates as a transparent bridge for a seamless integration into existing network environments. The Web-based management console allows simple configuration.

The command line interface (CLI) along with the SNMP support can be used for automated script-based integration into existing network management and ISP's tariff and billing systems.


Statistics, Logging and Accounting

The management console provides graphical usage statistics per link, user group, application and application class for configurable time intervals ranging from one hour to one year. A number of predefined reports help to regain control over the network, detailing the network usage from different perspectives.

All statistical data can be automatically exported at different aggregation levels (i.e., per link, per user, per user group) for subsequent processing in external accounting systems. Optional application-level connection logging, either internal or to an external syslog server, provides fine-granular service usage information.

Support

Flexible support options include regular signature updates, e-mail, phone and remote installation support. ipoque offers customization services to meet specific requirements not available in off-the-shelf products.

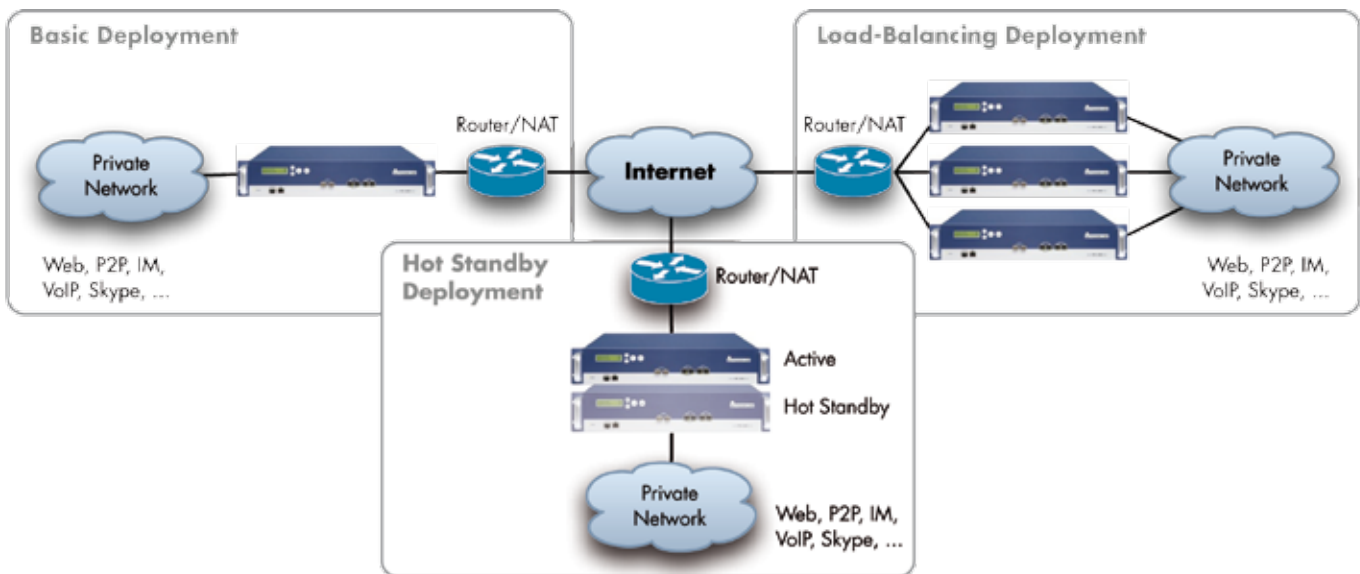

PRX Traffic Manager – Deployment Scenarios

	PRX-1000	PRX-2000	PRX-5G
--	----------	----------	--------

Performance

Throughput (Gbit/s)	1.7	2	>2
Packet Rate (Packets/s)	200,000	300,000	500,000
Number of Active Flows	1.7 million	1.7 million	20 million
New Flow Rate (Flows/s)	200,000	300,000	500,000

Configuration Limit

Subscribers	65,536	65,536	1 million
Policy Classes	20	50	100
Rules per Policy Class	20	50	100
Active Rules per Subscriber	20	20	20
Active Rules per System	1,310,720	1,310,720	1,310,720
Subnets	20	50	100
Subnet Exceptions	50	50	100
Profiles	20	50	50

Interfaces

Network Ports (Internal/External)	2x 10/100/1000Base-T	2x 10/100/1000Base-T optional: 2x SFP 1000Base-SX/LX	2x 10/100/1000Base-T optional: up to 4x SFP; or 4x 10/100/1000Base-T
Hardware Bypass	Yes	Yes (copper)	Yes (copper)
Management Port	10/100/1000Base-T	10/100Base-T	10/100/1000Base-T
Chaining Port	10/100/1000Base-T	10/100/1000Base-T	10/100/1000Base-T
Console Port	Serial DB-9	Serial RJ-45	Serial RJ-45

Hardware

Size (W x H x D in mm)	1U rack mount, 426 x 43.5 x 431.8	2U rack mount, 426 x 43.5 x 431.8	2U rack mount, 424 x 600 x 88
Weight (kg)	10	18	25
Power	100-240V, 50/60Hz, 250W	Redundant, AC 90-264V, 47-63Hz, 460W	Redundant, AC 90-264V, 47-63Hz, 460W

Protocol Support Includes

ssPeer-to-Peer (P2P) Protocols	AppleJuice, Ares, BitTorrent, DirectConnect, eDonkey, FastTrack, Filetopia, Freenet, Gnutella, Manalito, Mute, QQ, SoulSeek, WinMX, XDCC
Voice over IP (VoIP) Protocols	H.323, IAX, SIP, Skype
Instant Messenger (IM)	IRC, Jabber/Google Talk, MSN, Oscar, Yahoo

Optional Modules

Streaming Protocols	Flash, Joost, MMS, MPEG, Real Media Stream, Quicktime, Windows Media Stream
Standard Protocols	Direct Download Link, FTP, HTTP, IMAP, POP3, SMTP, Usenet
Advanced Reporting	subscriber reporting: <ul style="list-style-type: none"> per-application, per-subscriber statistics top talker statistics for applications and subscribers automatic CSV format FTP export connection logging for all applications incl. syslog support
IP Control	subscriber traffic management: <ul style="list-style-type: none"> policy classes to implement tiered service levels for subscriber groups rules per subscriber, per class and per link static subscriber-IP address mapping dynamic subscriber-IP address mapping via DHCP, RADIUS and static MAC addresses